

From projects to platforms.

Reducing risk in AI infrastructure through standardization and ecosystem integration.


Troy Goldschmidt, PE

VP of Critical Environments, Data Centers

Kele Incorporated

The project model can't absorb a 3x demand curve.

As demand grows, the limiting factor is not one technology; it is the delivery system.

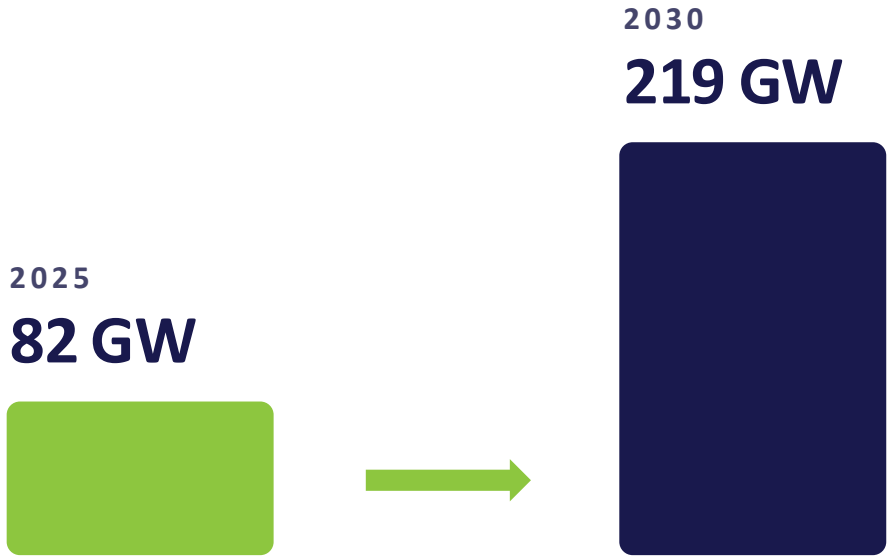

57%

of data center projects had a construction delay of 3+ months in 2025

33 wk

average global equipment lead time in 2026

42 wk

average U.S. equipment lead time, 83% above 2019 levels

24 mo

select materials are being preordered this far in advance

Sources: McKinsey Five Fifty, midrange global data center capacity demand estimate; JLL 2026 Global Data Center Outlook.

The question is not whether we can build more projects. It is whether the project model can scale.

At scale, variability multiplies.

One-off decisions compound into financial, operational, technical, and schedule risk, and repeat across buildings, suppliers, interfaces, and deployment waves.

A decision made once can become a risk repeated across the campus.



The project mindset. A complex reality.

One campus multiplies into dozens of independent variables, each optimized for its phase, not the portfolio.

RESULTS

- Inconsistent materials and equipment
- Last-minute design changes
- Higher maintenance cost

CAMPUS A

Independent variables

90

across 16 categories

9 Buildings	**5** Engineers of record	**3** General contractors	**6** System integrators
5 Electrical subcontractors	**4** Mechanical subcontractors	**4** Controls contractors	**12** Equipment OEMs
3 Commissioning agents	**3** BMS & DCIM platforms	**4** O&M service providers	**2** Utilities & AHJs
8 Distributors & suppliers	**9** Bills of material	**9** Submittal packages	**4** Spare-parts programs

Representative campus scenario

Kele

A project optimizes the delivery of a **specific facility: one scope, one schedule, one set of requirements**, closed out at handover.

A platform optimizes **repeatable delivery** of infrastructure across **facilities, deployment waves,** and **technology generations**.

ENABLED AND EXECUTED BY A COLLABORATIVE PARTNER ECOSYSTEM



PROJECT

One facility. One set of requirements.



PLATFORM

Repeatable by design. Built to scale and evolve.



PARTNER ECOSYSTEM

People. Partners. Shared purpose. Stronger together.

Kele

KELE INTEGRATION PERSPECTIVE

A platform is a delivery system, not a standard building.

Standardizing a design isn't enough. Repeatability is built by the system around it.

Platform architectures

Defined interfaces, not fixed buildings

Modular delivery

Repeatable scopes, built in parallel

Off-site fabrication

Field discovery moved upstream

PLC building blocks

Reusable logic across OEMs

Ecosystem collaboration

One playbook across firms

Supply chain resiliency

Alternates qualified before shortages

Built through systematic collaboration, not imposed as a single standard.

PLATFORM FRAMEWORK

Standardize the platform. Flex the white space.

The goal is not to freeze innovation. The goal is to put flexibility in the right place.

STANDARDIZE

- Interfaces
- Controls logic
- Data conventions
- Testing scripts
- Qualified alternates
- Procurement models
- Materials, equipment & instrumentation

FLEX


- Rack density
- Busway / RPP layouts
- Liquid cooling
- CDU arrangement
- Retrofit paths

Fix the interfaces, not the innovation.

KELE INTEGRATION PERSPECTIVE

Resolve the seams before fabrication.

The earlier the ecosystem sees the interfaces, the less the field has to discover.

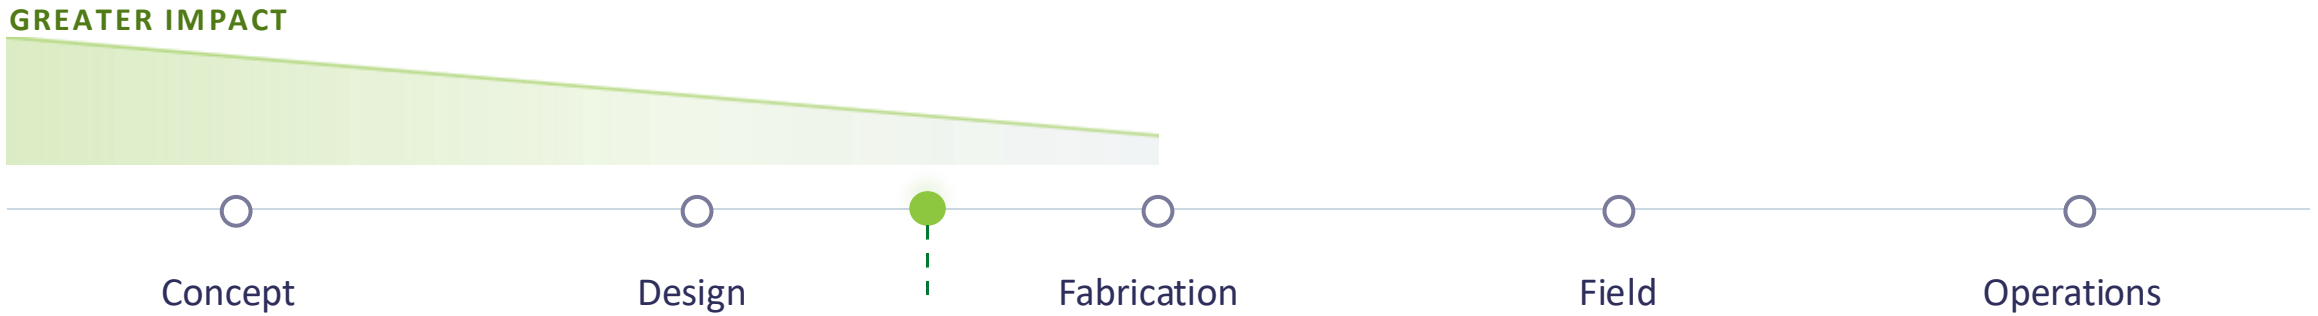

IN THE CONVERSATION BEFORE FABRICATION


- Operators
- Engineers
- Contractors
- OEMs
- Integrators
- Fabricators
- Commissioning
- Materials management
- Distributors
- Startup & service techs

Do not wait for the field to become the integration lab.

KELE INTEGRATION PERSPECTIVE

Integrate in the factory. Verify before the field.

Shift from field troubleshooting to repeatable verification.

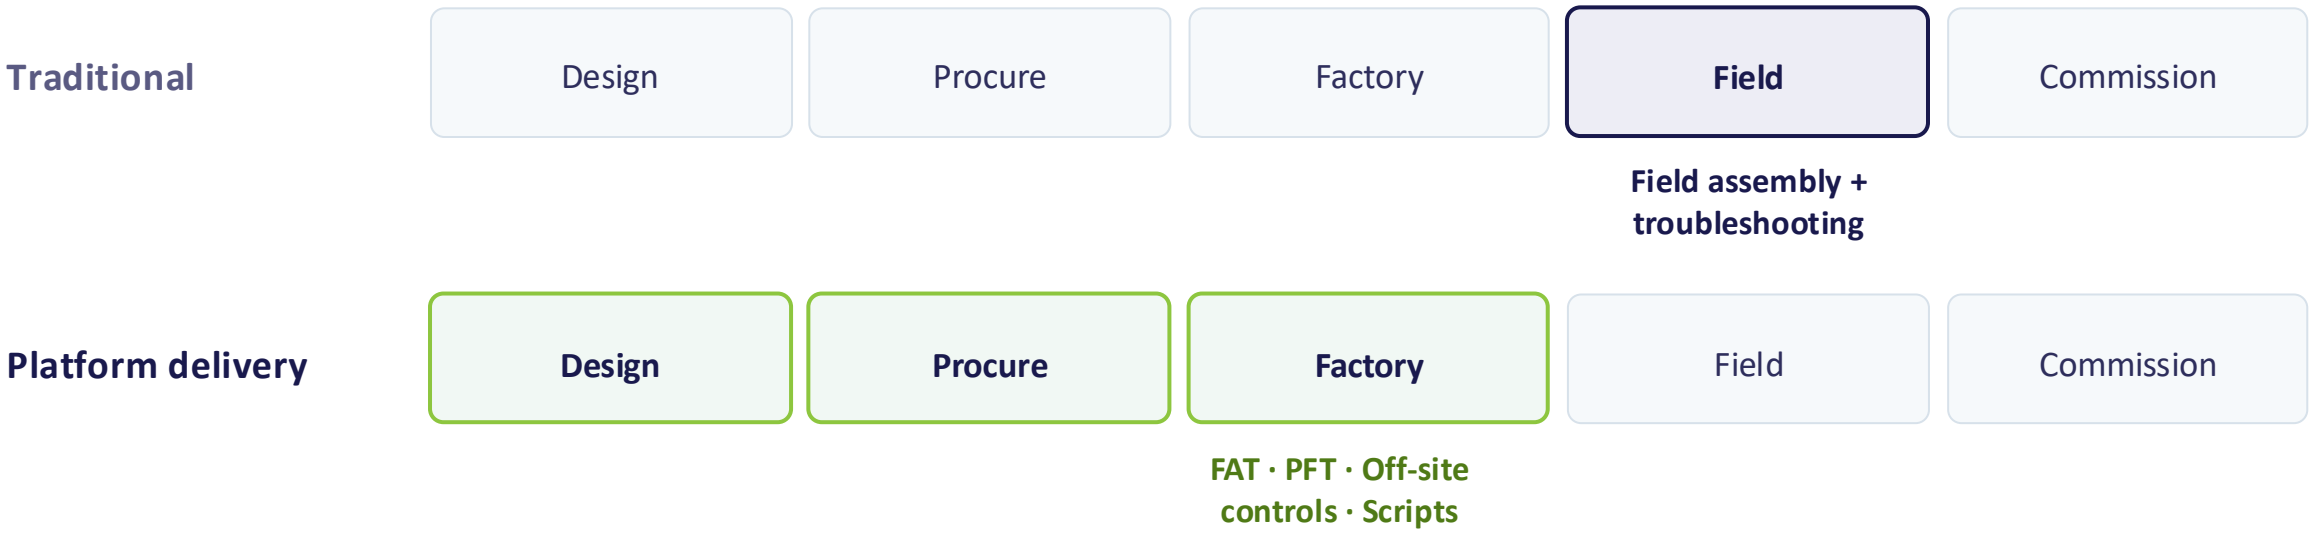

← **Discovery moves left. Field work becomes execution, not invention.**

One standard loop. One bill of materials.

Master Bill of Materials (MBOM) standardized - so the same instrument set repeats across buildings and deployment waves.

PROJECT BY PROJECT

140+	unique instrument part numbers across the campus
9	submittal and approval cycles, one per building
60+	spare-parts SKUs carried to cover the same functions

PLATFORM MBOM

22	Core part numbers
1	submittal package, reused every wave
12	spare SKUs: one kit covers the campus

Illustrative MBOM Standardization Scenario

One MBOM → Preorder and stage long-lead material → No late field substitutions → Train once. Stock one kit.

Standardizing the materials is what turns a repeatable design into a repeatable schedule.

PLATFORM APPLICATION: LIQUID COOLING

Different workloads. Different cooling — One interface.

A standardized facility-side interface defines instrumentation, redundancy, and maintenance access—allowing rack designs and cooling technologies to evolve without redesigning the underlying infrastructure.

PRODUCT-LED

- A cooling scheme per hall, per vendor
- Sensors and redundancy decided late, by whoever installs
- Retrofit means redesign
- Reliability argued case by case

INTERFACE-LED

- One standard rack and loop interface
- Sensor set, redundancy, and service access defined up front
- Retrofit is a planned path, not a project
- Reliability measured the same way in every hall

One interface standard → Vendor optionality without redesign → Same operating procedure every hall

Industry standards are evolving. Platform interfaces cannot wait.

First-of-kind must earn the right to repeat.

The operator test is practical: would we deploy it again?

01

Deployable

Can we build it repeatedly?

02

Maintainable

Can our teams own it?

03

Repeatable

Can suppliers support it?

04

Trustworthy

Can it perform under real conditions?

Measure innovation against lifecycle risk, not just first deployment speed.

PLATFORM FRAMEWORK

A platform organizes complexity

Partners aligned earlier around a repeatable backbone—designed to scale across deployment waves and technology generations.

TECHNOLOGY GENERATIONS	Gen 1	Gen 2	Gen 3	Gen N			
DEPLOYMENT WAVES							
FLEXIBLE WHITE SPACE	Rack density	Busway / RPP layouts	Liquid cooling	CDU arrangement	Retrofit paths	Keep the white space flexible	
REPEATABLE PLATFORM STANDARD	Interfaces	Controls + instrumentation	Data + sequences	Materials + alternates	Modular scopes	Verification	Standardize the backbone
STANDING PARTNER ECOSYSTEM	Owners	Engineers	Contractors	OEMs	Integrators	Commissioning	Materials	Align earlier

Manage complexity once. Deliver repeatedly across waves.

Telemetry makes the platform observable

A repeatable infrastructure platform needs a repeatable way to measure, contextualize, and securely share performance data.

PHYSICAL PLATFORM	Power	Cooling	Mechanical	IT	Infrastructure
CONTROLS + INSTRUMENTATION	Sensors	Meters	PLC / DDC	BMS / PMS	Observe
TELEMETRY	Granular	Real-time	Contextualized	Standardized	Measure
OPERATIONAL OUTCOMES	Fault detection	PUE / WUE	Workload profiling	Performance / watt	Act + improve

Opportunity to align further with OCP telemetry workstream.

The future will be deployed platform by platform.

Standardize the core.
Flex the white space.
Move risk upstream.

At gigawatt scale, repeatability is what makes speed possible.

Kele

Thank You!

LET'S CONNECT

Troy Goldschmidt, PE

715.348.9220 | troy.goldschmidt@kele.com

CONNECT ON LINKEDIN

